

XTREME HDPE MAT






TRANSPORT QUANTITIES

20ft ISO Container	20 Mats
40ft ISO Container	40 Mats
Flatbed Truck (48k)	50 Mats
Super B Truck(90k)	80 Mats

SPECIFICATIONS

Shipping Length	4.34m / 14.25ft	Internal Core	Solid Filled HDPE Closed Cell
Shipping Width	2.29m / 7.5ft	No. of Connectors	6 Open / 6 Threaded
Usable Length	4.11m / 13.5ft	Temperature Rating	-50° C / -58° F to 60° C / 140° F
Usable Width	2.06m / 6.75ft	Load Capacity	~ 56kg/cm ² / 828 PSI / 582 Ton/m ²
Area	8.46m ² / 91.13ft ²	Observed Comp. PSI	Over 70kg/cm ² / 1000 PSI
Thickness	100mm / 4in	Static Dissipative	Yes
Weight	385kg±10kg / 860lbs ±22lbs	UV Protection	Yes
Material	High Density Polyethylene	Flammability Rating	UL94HB
Color	Yellow	Life Expectancy	15+ Years

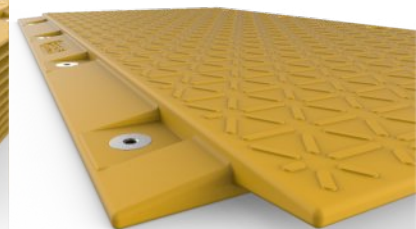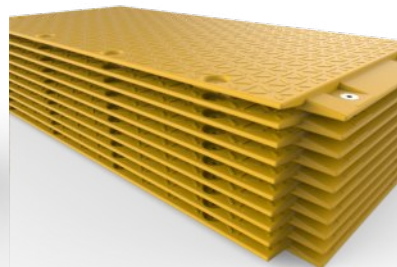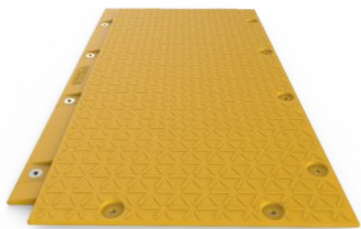

CONNECTOR TRANSITION SUPPORT

SPECIFICATIONS


Length	2.040m / 80in
Width	0.460m / 18in
Height	0.061m / 2in
Weight	25kg±1kg / 55lbs ±2lbs
Material	High Density Polyethylene
Color	Yellow
No. of Connectors	2
Temperature Rating	-50° C / -58° F to 60° C / 140° F
Static Dissipative	Yes
UV Protection	Yes
Internal Core	Solid Filled HDPE Closed Cell



BOLT CONNECTOR

SPECIFICATIONS

Length	0.86m / 3.4in
Width	0.100m / 4in
Weight	1kg / 2.2lbs
Thread Type	Self Cleaning Coarse
Head Size	38mm / 1-1/2" HEX HEAD
Material	Galvanized Cast

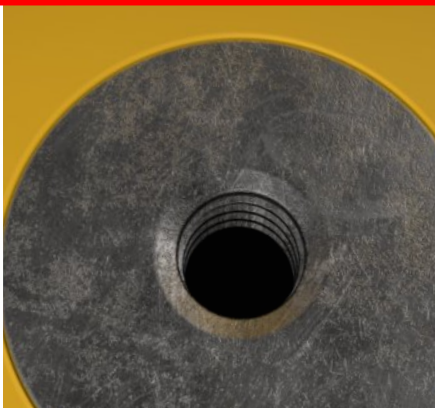

FEATURES

1

LIGHTEST HEAVY DUTY RIG MAT ON THE MARKET

Weighing in at 385kgs / 860lbs, our HDPE Rig Mat is the lightest heavy duty HDPE mat on the market. Not only does this lightweight mat make for easy onsite mobility but you can load 50 mats per truck in the USA. This feature alone will significantly save you time and money.

2

SOLID INTERNAL CORE

With our proprietary design of a solid HDPE closed cell filled core, this mat provides unbelievable core compression strength and the ability to eliminate any absorption of foreign contaminants which will prevent any cross contamination once the mats are re-mobilized from site to site.

3

CAN BE INSTALLED IN OFFSET CONFIGURATIONS

Our mats can be installed onsite in a variety of configurations to adapt to site conditions and layout requirements. When installed in offset staggered patterns, our matting system offers an unmatched strength and behavior under the softest ground conditions.

4

PATENTED CONNECTORS

Our patented bolt connection assembly is designed to be self cleaning which allows you to secure the connection without any hassle, extra tools and ease in snow, ice and muddy conditions. Plus, the connections between the mats joints and containment system components are extremely strong and flush, which make the system less hazardous by eliminating any tripping hazards.

5

ELIMINATE CONTAMINATION

When you need to protect the surface of an entire drilling operation site or some farm land from cross contamination of infestuous weeds. Using our modular system in conjunction with a protective liner, you can build a secondary containment system in a variety of configurations. You won't find a better cost effective solution for protection in the market.

6

BUILD A FLOATING ACCESS ROAD OR PLATFORM

When you encounter very soft or swamp like conditions in the field and need to transport the most heaviest loads. Creating a modular floating system using our mats and components will provide you the solution you need. Our mats can be used as a floating access road or as a base platform under any wood access matting to build the most cost effective access system that will allow the passage of almost any industrial heavy equipment load.

7

SELF-ALIGNING MATS

Our mats have built-in self-aligning tabs that allow for easy guidance when installing the mats in the most unruly and uneven site conditions every time.

8

100% RECYCLABLE

Our mats are made from high quality virgin HDPE resins. They can be 100% recycled for a refund value at many recycling facilities across the Globe.

LIMITED WARRANTY

Xtreme Mattings Corp. warrants, for a period of one (1) year after acceptance, that the items delivered hereunder will be free from defects in workmanship and materials supplied by Xtreme Mattings Corp., specifically excluding, however, any third party manufactured items. Should any item delivered be found defective or deficient within the specified warranty period provided, and such defect or deficiency is the result of Xtreme Mattings Corp.'s faulty workmanship, Xtreme Mattings Corp. will replace or repair the defective or deficient item. In no event shall Xtreme Mattings Corp.'s warranty obligation exceed repair or replacement of the defective or deficient item. As a condition precedent to Xtreme Mattings Corp.'s obligation to perform any remedial warranty work, the purchaser must notify Xtreme Mattings Corp. in writing within sixty (60) days of the discovery of any defect or deficiency in the item for which the purchaser wishes to make a warranty claim. This notice shall specify the exact nature of the claimed defect or deficiency and afford Xtreme Mattings Corp. a reasonable opportunity to inspect the claimed defect or deficiency before any corrective work is undertaken. The warranty only covers normal use of the product if the usage is undertaken using recommended handling techniques and adhering to limitations as referenced in the Xtreme Mattings - Installation Manual. Xtreme Mattings Corp. shall determine whether corrective work shall be undertaken by Xtreme Mattings Corp. at the current location of the product or if the product will be returned to Xtreme Mattings Corp. at Xtreme Mattings Corp.'s expense (Continental U.S.A and CANADA. only) for corrective work. In no event shall Xtreme Mattings Corp. be liable to the purchaser for any sum in excess of the cost of repairs or replacements as specified above, even if such defect or deficiency in the item is attributable to or caused by Xtreme Mattings Corp.'s negligence or fault, defect or deficiency in the materials, tools, machinery or equipment of Xtreme Mattings Corp.

IT IS SPECIFICALLY UNDERSTOOD AND AGREED TO BY THE PURCHASER THAT THE FOREGOING WARRANTY IS THE PURCHASER'S EXCLUSIVE REMEDY FOR WARRANTY CLAIMS AND NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, ARE OR WILL BE DEEMED TO HAVE BEEN MADE BY XTREME MATTINGS CORP. EXCEPT THE WARRANTY SET FORTH HEREIN. XTREME MATTINGS CORP. DOES NOT WARRANT EQUIPMENT OR SUPPLIES MANUFACTURED BY OTHERS. THIS WARRANTY IS GIVEN IN LIEU OF ANY OTHER WARRANTIES OR ANY ACTION IN TORT (INCLUDING NEGLIGENCE OR STRICT LIABILITY) OR CONTRACT AGAINST XTREME MATTINGS CORP.. THERE ARE NO WARRANTIES WHATSOEVER GRANTED TO THE PURCHASER, WHICH EXTEND BEYOND THOSE CONTAINED HEREIN.

Disclaimer of warranty. The foregoing warranties are in lieu of all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose